

PVC FACADE PROFILE WITH PROTECTIVE TAPE

Intended use:

The profiles are intended for making decorative joints (rustication) in insulation systems (ETICS). It makes work easier and improves the aesthetics of the completed facade.

Product description:

Top quality profile. The PVC used for production contains special additives which make it resistant to UV radiation. The profile is secured with a protective tape that protects the profile surfaces against dirt during the assembly process.


Application:

The profile is installed on the outer part of the facade. The rustication profile is used to create even and aesthetic decorative slots - rustication. Cut a gap in the Styrofoam and attach the profile in it using insulation glue. Then attach the façade glass mesh to the perforated edge of the profile, embedding it in an appropriate mortar. Then, apply structural plaster according to the technology.



Functional graphics for product PVC B.

Technical sketch:

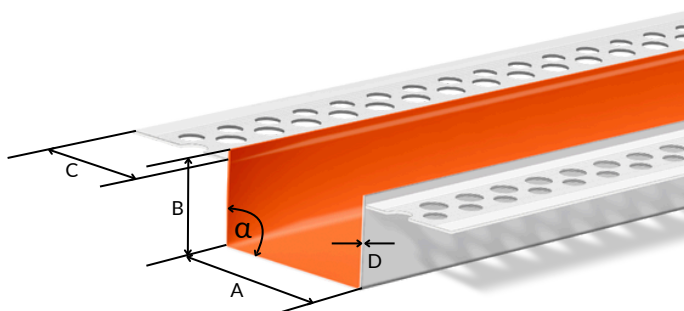

Material:

PVC (polyvinyl chloride) - a synthetic polymer used to produce plastics. It is characterized by flexibility and mechanical strength. Chemically and weather-resistant.

| symbol | PVC B/1 | PVC B/2 | PVC B/3 | PVC B/5 |
|----------------------|---------|---------|---------|---------|
| materiał | PVC | PVC | PVC | PVC |
| wymiar A | 10 mm | 20 mm | 30 mm | 50 mm |
| wymiar B | 23 mm | 23 mm | 23 mm | 23 mm |
| wymiar C | 23 mm | 23 mm | 23 mm | 23 mm |
| wymiar D | 0,9 mm | 0,9 mm | 0,9 mm | 0,9 mm |
| kąt α | 89° | 89° | 89° | 89° |
| waga/1mb. | 90 g | 161,7 g | 173,4 g | 188,4 g |
| pakowanie (szt.) | 20 | 10 | 10 | 10 |
| drewniany box (szt.) | 680 | 560 | 440 | 400 |
| paleta (szt.) | 1 000 | 680 | 560 | 520 |

Released on February 15, 2024.

This update invalidates all previous versions of this data sheet. Product dimensions and weights quoted are nominal and may be within permitted manufacturing tolerances.